



Beam-mounted pull-out unit, short side handled, 600 kg load capacity, 70% extraction

For Standard EUR pallets, 800 x 1200 mm.

- Loading capacity given is for an evenly distributed load.
- Loading can be done from both sides, for rear loading unit we recommend the reinforced unit 11 602-0.
- 70% extension gives good enough access in most cases and is the most economical option.
- Double ball bearings at the front allow for low profile combined with smooth action and very long life.
- Delivered fully assembled and tested.
- Mounting kit 24-M8-140 for fitting to pallet racking is included, for other kits see table on the reverse!
- Rear beam must be securely bolted to the pallet racking! Pallet racking must be securely bolted to the floor!
- Pallet rack support beam must have an approved weight capacity, see table on the reverse!



PRODUCT FEATURES


600	70	821	1204	69	Min 970 Max 1170

LOADING




PICKING



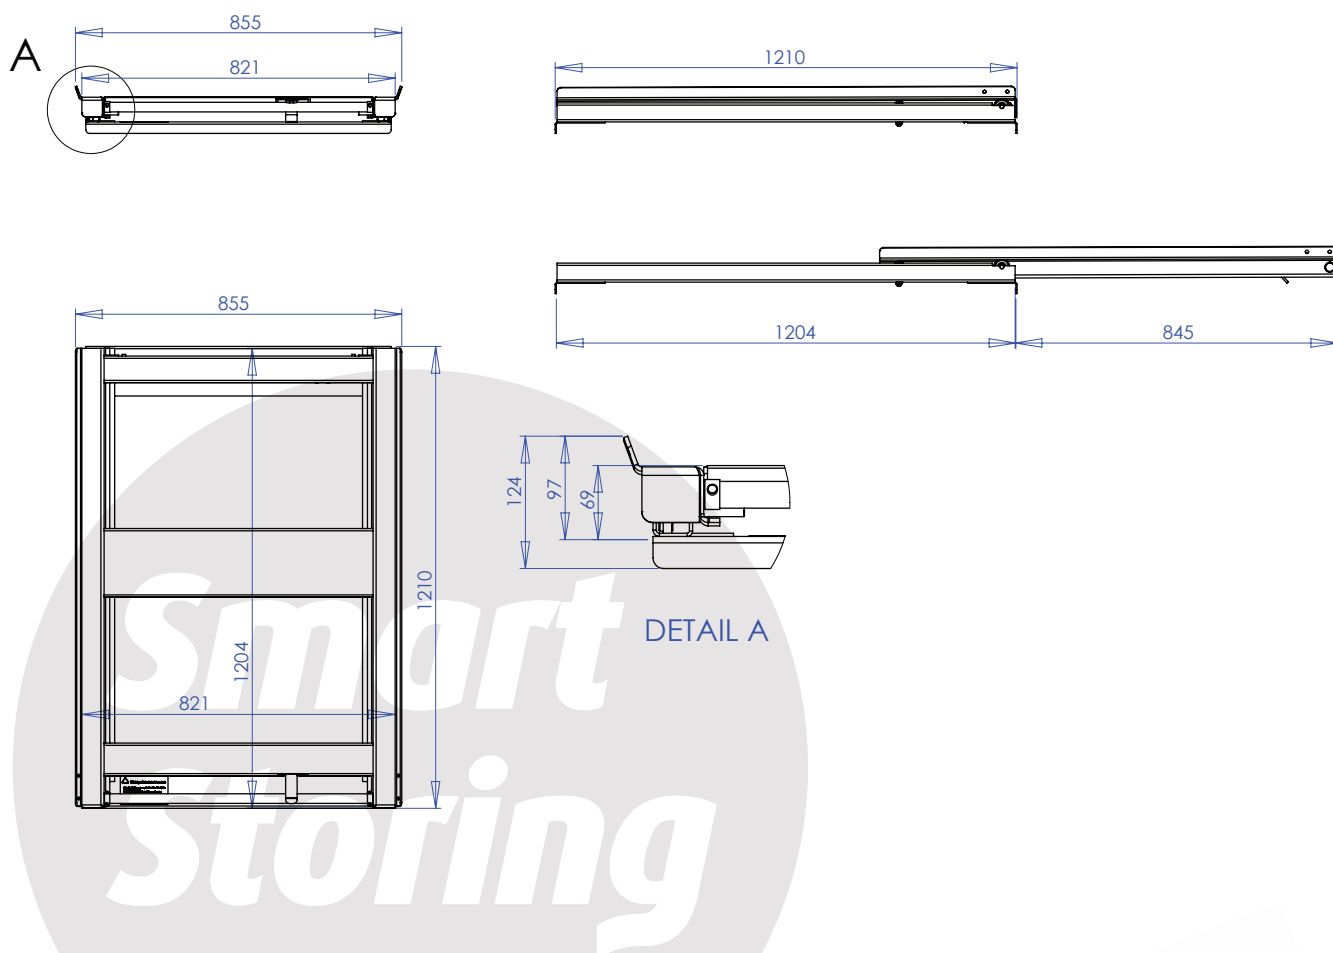


MOUNTING KIT

Article number	Specification
24-M8-100H	Mounting kit BM for beam height up to 75 mm
24-M8-120H	Mounting kit BM for beam height up to 95 mm
24-M8-140H	Mounting kit BM for beam height up to 115 mm
24-M8-160H	Mounting kit BM for beam height up to 135 mm
24-M8-180H	Mounting kit BM for beam height up to 155 mm
24-M8-200H	Mounting kit BM for beam height up to 175 mm

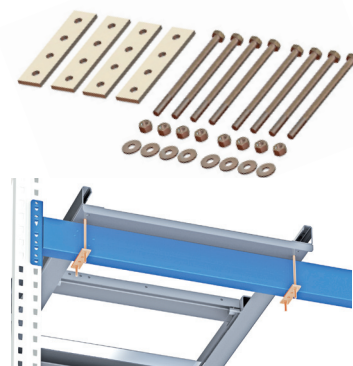

WEIGHT AND VOLUME

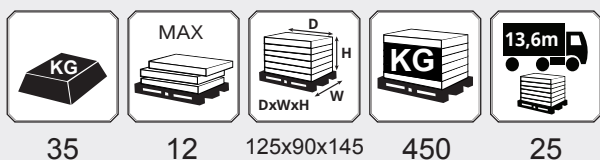

35

12

125x90x145

450

25



WEIGHT CAPACITY SUPPORT BEAM

Minimum weight capacity / support beams pair

1 pallet	2 pallets	3 pallets
1475 kg	2110 kg	2745 kg

OBS! Only one unit per section may be extracted at a time!