



Beam-mounted pull-out unit, short side handled, 1000 kg load capacity 70% extraction

For Standard EUR pallets, 800 x 1200 mm.

- Loading capacity given is for an evenly distributed load.
- Loading can be done from both sides, for rear loading unit we recommend the reinforced unit 11 1002-0.
- 70% extension gives good enough access in most cases and is the most economical option.
- Double ball bearings at the front allow for low profile combined with smooth action and very long life.
- Mounting kit 24-M10-140 for fitting to pallet racking is included, for other kits see table on the reverse!
- Rear beam must be securely bolted to the pallet racking! Pallet racking must be securely bolted to the floor!
- Pallet rack support beam must have an approved weight capacity, see table on the reverse!



PRODUCT FEATURES


1000	70	834	1204	91	Min 970 Max 1170

LOADING




PICKING



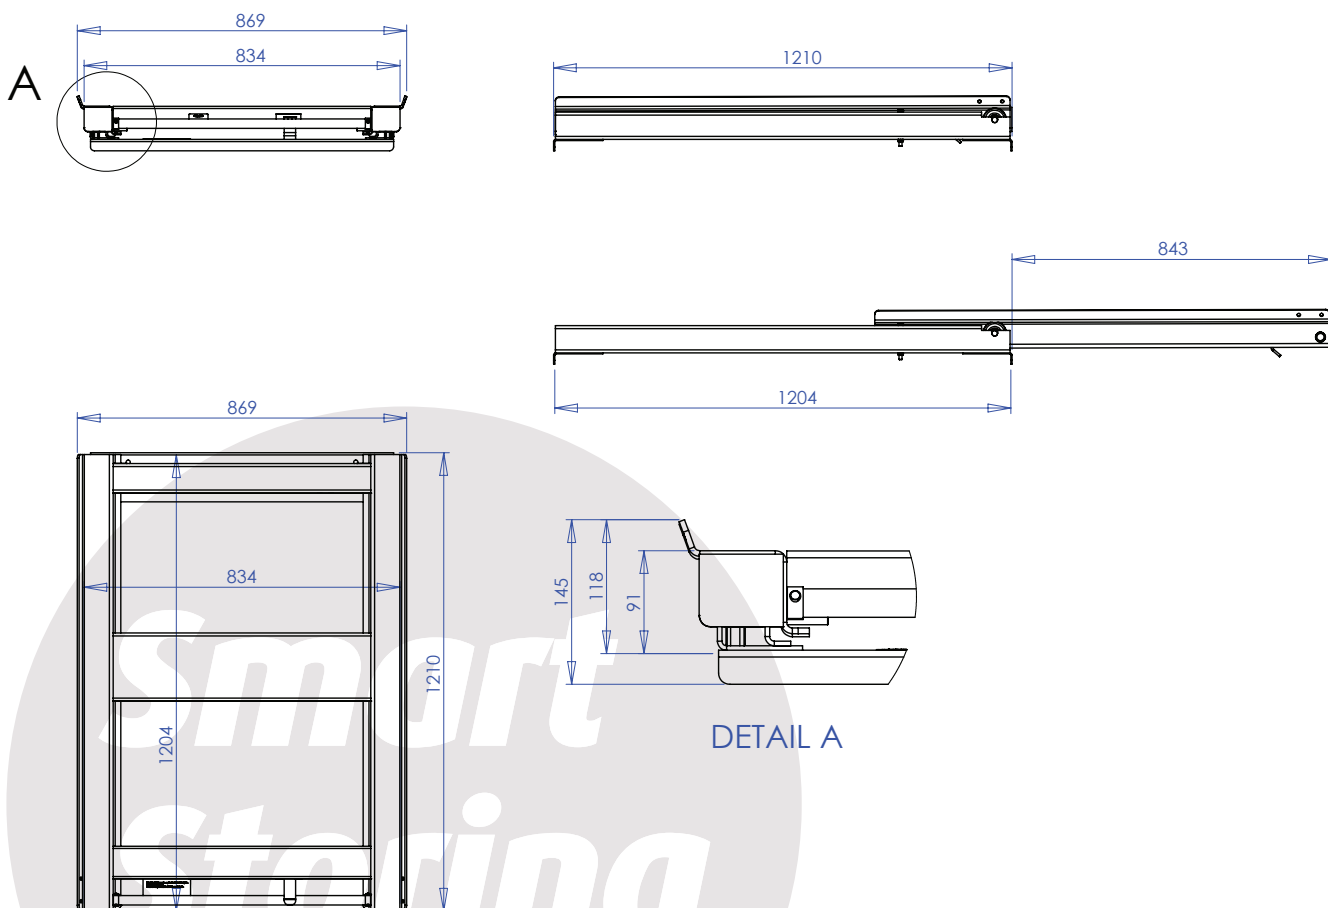


MOUNTING KIT

Article number	Specifikation
24-M10-100H	Mounting kit BM for beam height up to 70 mm
24-M10-120H	Mounting kit BM for beam height up to 90 mm
24-M10-140H	Mounting kit BM for beam height up to 110 mm
24-M10-160H	Mounting kit BM for beam height up to 130 mm
24-M10-180H	Mounting kit BM for beam height up to 150 mm
24-M10-200H	Mounting kit BM for beam height up to 170 mm

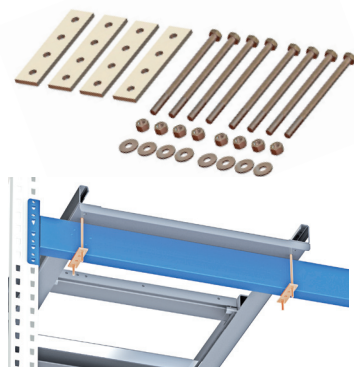

WEIGHT AND VOLUME

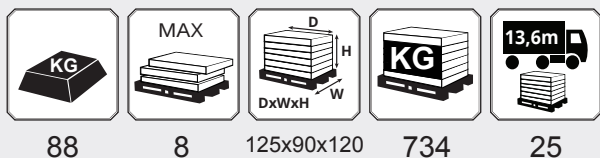

88

8

125x90x120

734

25



WEIGHT CAPACITY SUPPORT BEAM

Minimum weight capacity / support beams pair

1 pallet	2 pallets	3 pallets
2486 kg	3572 kg	4658 kg

OBS! Only one unit per section may be extracted at a time!